



Corrosion Protection Solutions

www.noco.tech | (561) 570-2994 | info@noco.tech



AMP-UP™ RB

SELF-HEALING REBAR COATING

AMP-UP™ RB is a new, single component, self-healing, hybrid epoxy protective coating for reinforcing bar and structural steel embedded in concrete.

No more measuring, mixing, and carefully planning open times. **AMP-UP™ RB** offers unrivaled flexibility for the installing contractor, while surpassing performance requirements for engineers. **AMP-UP™ RB's** distinct pink color allows for easy identification of coated areas.

AMP-UP™ RB – the smarter way to coat rebar.

- ✓ Extended Open Window - Up to 180 days
- ✓ Award-Winning, Patented Self-Healing Technology
- ✓ Single component
- ✓ Pink Color – Easily identify coated steel
- ✓ Exceptional Adhesion (ASTM D7913)
- ✓ Quick Dry Time
- ✓ Environmentally Friendly (Low VOC)
- ✓ Increased coverage per gallon (+250 ft²)




AMP-UP™ Your Rebar

Coating rebar for corrosion protection is common practice in the concrete repair & restoration process. Many products require mixing & measuring of multiple components and give contractors a very small window to apply the repair mortar after the rebar has been coated.

AMP-UP™ RB offers contractors & engineers the best of both worlds: higher performing corrosion protection & easier application.

AMP-UP™ RB is one component, low VOC rebar coating that gives contractors the flexibility to extend open times on repairs (up to 180 days!*). Using its patented self-healing technology, **AMP-UP™ RB** responds to any physical damage during the repair open time without the need for manual intervention or touchups. **AMP-UP™ RB** makes coating & protecting rebar simple for everyone involved; it's an easy choice.

*Surface prep to SSPC SP-3 or SP-6. 2 coats of AMP-UP RB at recommended WFT.

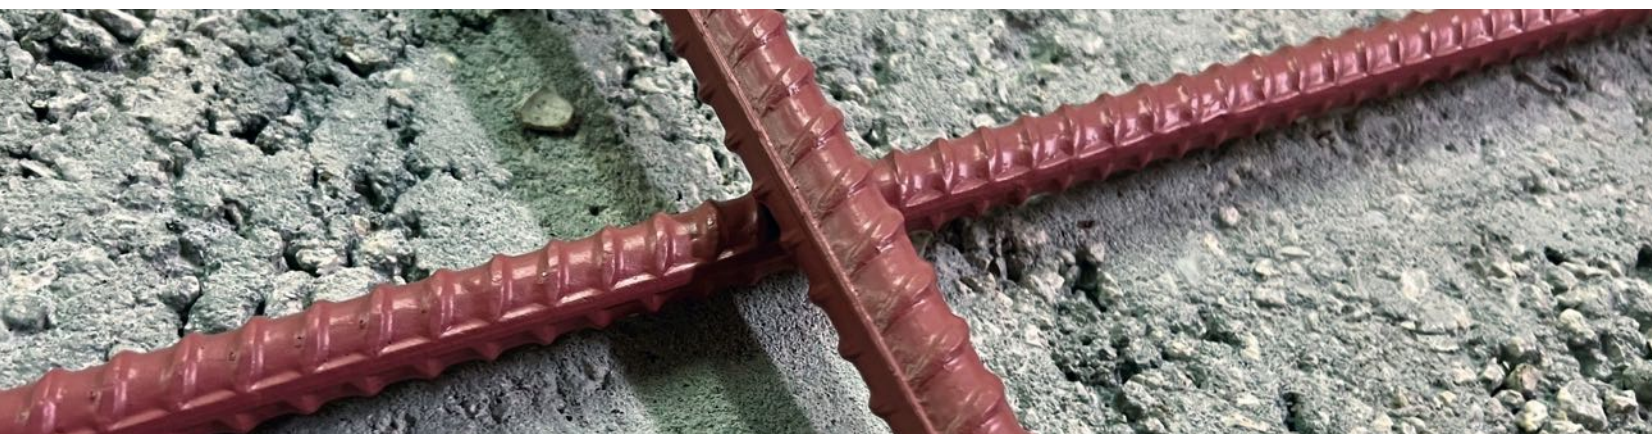

HIGH PERFORMANCE. EASIER APPLICATION. INCREASED EFFICIENCY.

AMP-UP RB™